

An aerial night view of a city skyline, likely Dubai, with numerous skyscrapers illuminated. The sky is dark with visible stars, suggesting a night sky. The city lights create a vibrant, glowing effect against the dark background.

Crompton


# Futuristic **Lighting.** Timeless **Trust.**

LED Price List w.e.f. 1st November 2019

**Crompton Greaves Consumer Electricals Limited**

PRESENCE ACROSS THE NATION

Location of Crompton Facilities in India

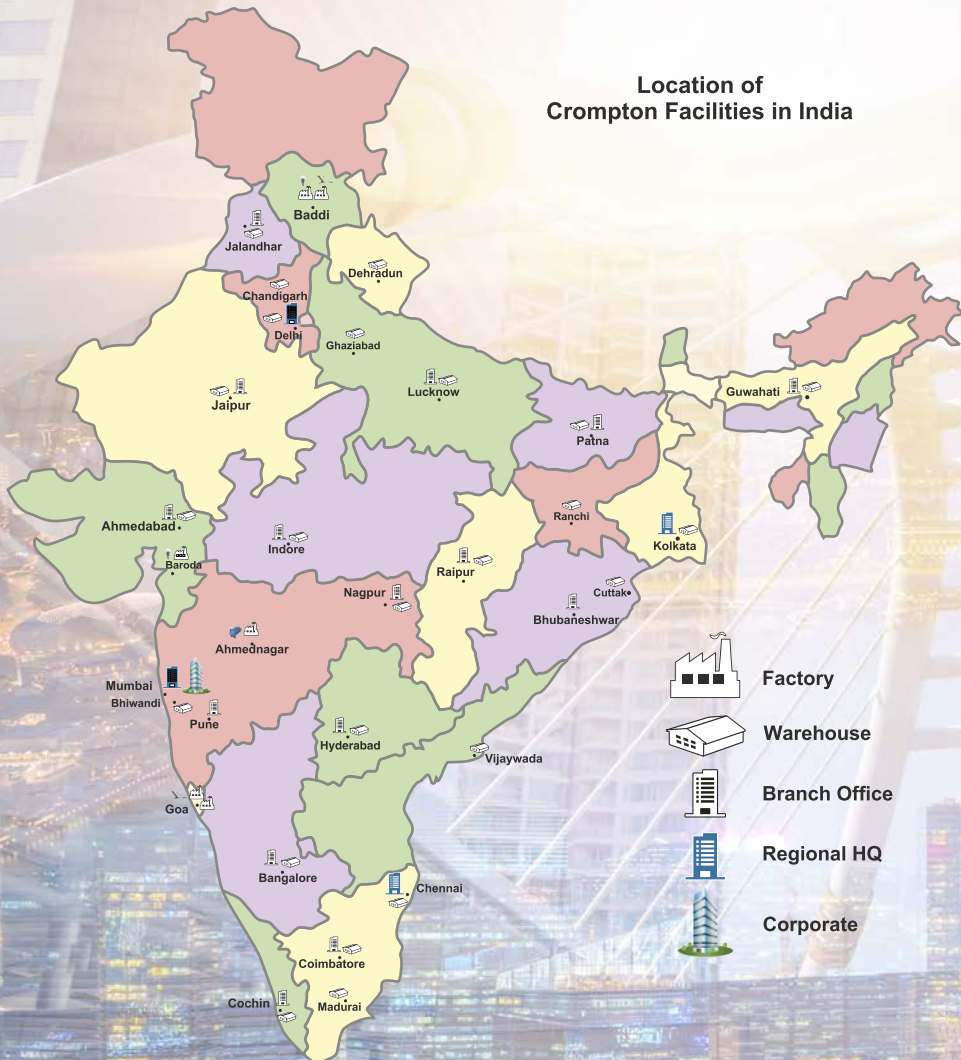

### ***Traditional craftsmanship. Tomorrow's innovation***


Crompton lighting has been setting the standard for Product quality, reliability and performance. And today we're a lot more than tradition. It's why millions of people in India have come to rely on Crompton to provide comfort and convenience.

Every Crompton product has been meticulously designed and crafted to be more than robust and beautiful. It's why our customers have come to demand Crompton performance time and time again.

Crompton lighting products produce a wow response whenever you enter a household or commercial space. Products that express your personality, that reflects your lifestyle. Products that help you get the most out of all your investments. Precisely engineered, hand crafted and built to last. Our commitment is to provide the best styles and highest industry quality standards in Crompton lighting products and accessories.



**Crompton LED RGBW facade lighting installations at BMC head quarter, Mumbai.**

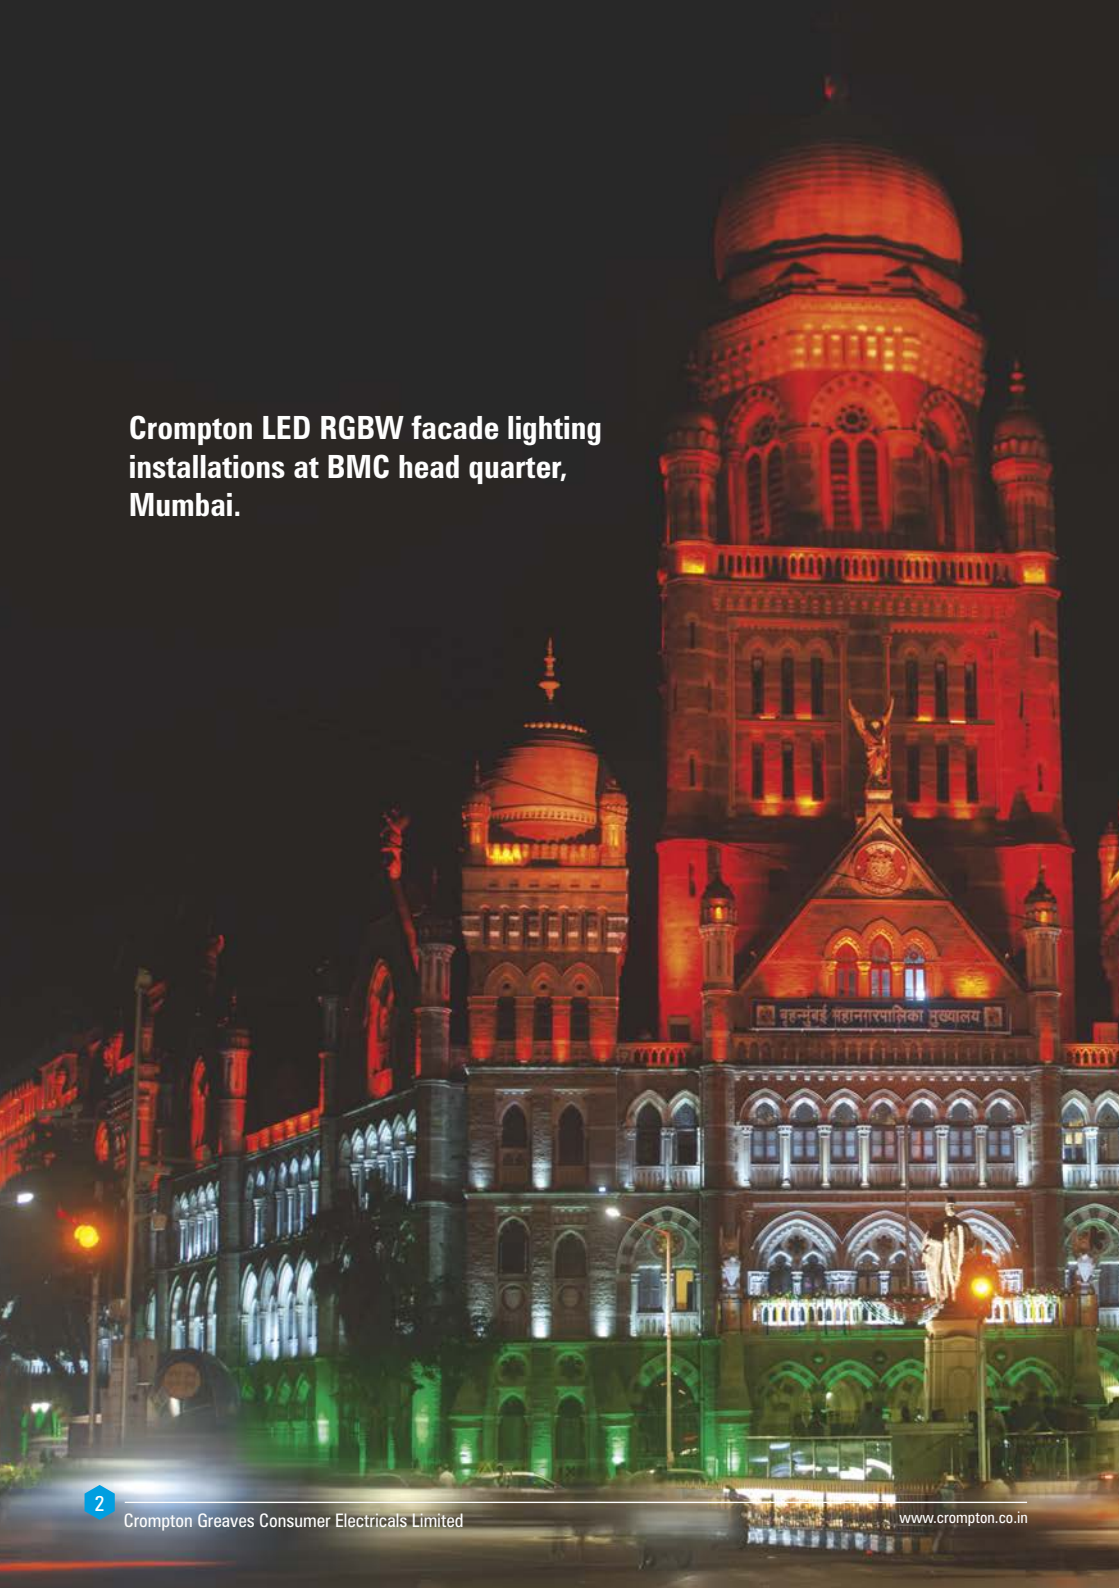

# INDEX

- 4 INDOOR COMMERCIAL LIGHTING
- 28 INDUSTRIAL LIGHTING
- 32 BATTEN & LED LAMPS
- 36 CLEANROOM LIGHTING
- 38 FLAMEPROOF LIGHTING
- 40 STREET LIGHTING
- 44 FLOOD LIGHTING
- 46 LANDSCAPE LIGHTING
- 51 SOLAR STREET LIGHTING
- 56 HIGH MAST & POLES
- 64 LIGHTING MANAGEMENT SYSTEM
- 66 LED OUTDOOR ACCESSORIES



# ***INDOOR COMMERCIAL LIGHTING***



# Human Centric Lighting

*INSPIRED BY THE SUN*

## CIRCADIAN RHYTHMS

A circadian rhythm is a natural, internal process that regulates the sleep-wake cycle and repeats roughly every 24 hours.

## HUMAN CENTRIC LIGHT BENEFITS

- Follows Circadian rhythms
- Enhances Mood
- Improves Productivity
- Provides Visual Acuity
- Offers energy savings
- Offers sustainability
- CCT of lights follows circadian rhythm





## HUMAN CENTRIC LIGHTING

**TREND I HCL**

Trend I is an elegant suspended lighting solution with 75mm width and 85mm height. The clean design and high luminance level makes it ideal for corporate offices and institutions.

**Available in Human Centric Lighting**

**Product Description**

CCP-133-40-HCL-SL-BT-DWH

**MRP (₹)**

Price on Request

**STELLUX - P HCL**

LED STELLUX-P Recess mounted Signature series premium commercial luminaire **Available in Human Centric Lighting**



Eco-Friendly



LG7 Compliant




IP20 Ingress Protection



Recessed Mounted



&lt;19 Unified Glare Rating

**Product Description**

CCR-131-30-HCL-SL-BT-DWH

**MRP (₹)**

Price on Request

**STELLUX - I HCL**

LED STELLUX-I Recess mounted Signature series premium commercial luminaire **Available in Human Centric Lighting**



Eco-Friendly



LG7 Compliant



IP20 Ingress Protection



Recessed Mounted



&lt;19 Unified Glare Rating

**Product Description**

CCR-131-30-HCL-SL-BT-DWH

**MRP (₹)**

Price on Request

**STYLO - O HCL**

Stylo - O bring forth innovative design, circle in square shape offering emboss small panel appearance with sleek aluminum PDC body.

**Available in Human Centric Lighting**

**Product Description**


CDR-217-18-HCL-SL-BT-DWH

**MRP (₹)**

Price on Request

**VOGUE**

Vogue is an elegant suspended lighting solution with 52mm width and 75mm height. The clean design and high luminance level makes it ideal for corporate offices and institutions. Create perfectly straight lines using the continuous mounting arrangement or go modular with geometrical shapes. Efficacy 100LM/W



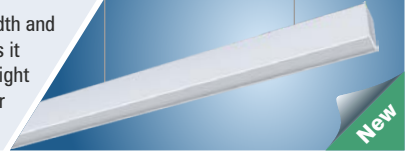


Product Description	MRP (₹)
CCP-121-18-57-SL-NWH	7500
CCP-121-18-40-SL-NWH	7500
CCP-121-24-57-SL-NWH	8000
CCP-121-24-40-SL-NWH	8000
CCP-121-28-57-SL-NWH	8500
CCP-121-28-40-SL-NWH	8500

**VOGUE CONNECTOR**

VOGUE family can be joined in multiple way like L, Y, T, +.

TYPE	MRP (₹)
L - CONNECTOR	Price On Request
Y - CONNECTOR	Price On Request
T - CONNECTOR	Price On Request
+ - CONNECTOR	Price On Request

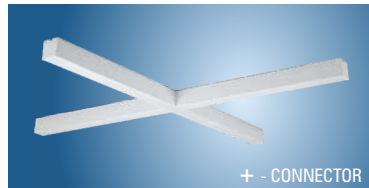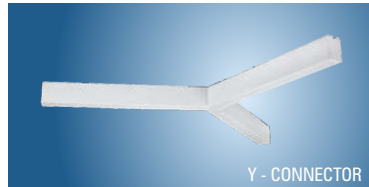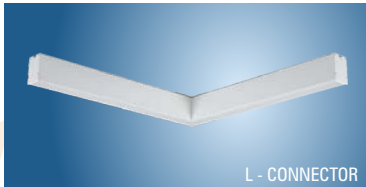


## INDOOR LIGHTING

## TREND I

Suspended linear in sleek design is suitable for all commercial spaces.

Available in : 36W - 4 ft, 72W - 8 ft.

\*This luminaire is also available in up down light distribution.

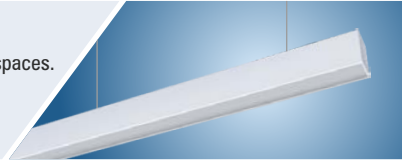


Product Description	MRP (₹)
LCLP54-36-CDL	9000
LCLP54-36-TL	9000
LCLP54-36-WW	9000
LCLP54-72-CDL	16000
LCLP54-72-TL	16000
LCLP54-72-WW	16000

## TREND II

Recessed mounted linear with its minimalistic shape offers complete versatility for all types of spaces such as offices, reception areas, meeting rooms and corridors.

Available in : 30W & 36W - 4 ft.

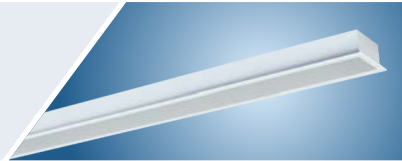

Product Description	MRP (₹)
LCLR66-30-CDL	7500
LCLR66-30-TL	7500
LCLR66-30-WW	7500
LCLR90-36-CDL	8500
LCLR90-36-TL	8500
LCLR90-36-WW	8500



**ORBIT**

Orbit LED cylinders employ the same quality lighting and design configuration to ensure consistent colour point between luminaires within a lighting application. Available in Black and white colour option in 5700K, 4000K, 3000K CCT. Beam angle 36°



Product Description	MRP (₹)
CDS-201-15-57-HL2-NWH	4500
CDS-201-15-40-HL2-NWH	4500
CDS-201-15-30-HL2-NWH	4500
CDS-201-20-57-HL2-NWH	4700
CDS-201-20-40-HL2-NWH	4700
CDS-201-20-30-HL2-NWH	4700
CDS-200-25-57-SL-NWH	6800
CDS-200-25-40-SL-NWH	6800
CDS-200-25-30-SL-NWH	6800
CDS-200-30-57-SL-NWH	7200
CDS-200-30-40-SL-NWH	7200
CDS-200-30-30-SL-NWH	7200
SO419005 (15W & 20W)	Price on Request*
SO419006 (25W & 30W)	Price on Request*

\* Pendant accessory needs to be ordered separately.

**ORBIT**

Orbit LED cylinders employ the same quality lighting and design configuration to ensure consistent colour point between luminaires within a lighting application. Available in Black and white colour option in 5700K, 4000K, 3000K CCT. Beam angle 36°



Product Description	MRP (₹)
CDS-201-15-57-HL2-NBK	4500
CDS-201-15-40-HL2-NBK	4500
CDS-201-15-30-HL2-NBK	4500
CDS-201-20-57-HL2-NBK	4700
CDS-201-20-40-HL2-NBK	4700
CDS-201-20-30-HL2-NBK	4700
CDS-200-25-57-SL-NBK	6800
CDS-200-25-40-SL-NBK	6800
CDS-200-25-30-SL-NBK	6800
CDS-200-30-57-SL-NBK	7200
CDS-200-30-40-SL-NBK	7200
CDS-200-30-30-SL-NBK	7200
SO419005 (15W & 20W)	Price on Request*
SO419006 (25W & 30W)	Price on Request*

\* Pendant accessory needs to be ordered separately.

## INDOOR LIGHTING

## FAME SPOT

New series of LED Spot Light specially designed for commercial usage  
Long life with 30000 burning hours with CRI > 80. Wide choice  
available in 3W, 6W, 9W, 12W, 15W, 18W, 24W, 30W, 40W,  
50W, 3000K and 4000K CCT. Beam angel 36°, Vertical Tilt 30°



Product Description	MRP (₹)
CDR-210-03-40-SL-NWH	1000
CDR-210-03-30-SL-NWH	1000
CDR-211-06-40-SL-NWH	1300
CDR-211-06-30-SL-NWH	1300
CDR-211-09-40-SL-NWH	1550
CDR-211-09-30-SL-NWH	1550
CDR-212-12-40-SL-NWH	1750
CDR-212-12-30-SL-NWH	1750
CDR-212-15-40-SL-NWH	2000
CDR-212-15-30-SL-NWH	2000
CDR-213-18-40-SL-NWH	2600
CDR-213-18-30-SL-NWH	2600
CDR-213-24-40-SL-NWH	3000
CDR-213-24-30-SL-NWH	3000
CDR-214-30-40-SL-NWH	4000
CDR-214-30-30-SL-NWH	4000
CDR-215-40-40-SL-NWH	5100
CDR-215-40-30-SL-NWH	5100
CDR-215-50-40-SL-NWH	5800
CDR-215-50-30-SL-NWH	5800

## ZOOM LIGHT

Zoom light offers the most potent solution for indoor focused lighting  
requirements. This product suits the architectural lighting  
requirements for modern offices and commercial spaces.  
Beam angel 36°, Tilt 90°



Product Description	MRP (₹)
LCSRRA-24-CDL	5700
LCSRRA-24-TL	5700
LCSRRA-24-WW	5700

## INDOOR LIGHTING

## LUNAR


A timeless classic, the LUNAR is the top of its class when it comes to large disk feature lighting. With a range of 3 sizes, ideal for modern living spaces where design and interest are upper most.



Product Description	MRP (₹)
LCSUR3-25-CDL	7800
LCSUR3-25-TL	7800
LCSUR3-25-VVV	7800
LCSUR4-36-CDL	8800
LCSUR4-36-TL	8800
LCSUR4-36-VVV	8800
LCSUR6-40-CDL	12000
LCSUR6-40-TL	12000
LCSUR6-40-VVV	12000

## EPSILON

The hexagonal Epsilon is meticulously welded to resemble uniform lighting functionally light softens up the overall light source and exemplifies illumination on a grand scale.



New

Product Description	MRP (₹)
CCP-128-36-57-SL-NWH	10000
CCP-128-36-40-SL-NWH	10000
CCP-128-36-30-SL-NWH	10000

## CAPELLA

The triangular Capella is meticulously welded to resemble uniform lighting functionally light softens up the overall light source and exemplifies illumination on a grand scale.



New

Product Description	MRP (₹)
CCP-129-36-57-SL-NBK	14000
CCP-129-36-40-SL-NBK	14000
CCP-129-36-30-SL-NBK	14000

## INDOOR LIGHTING

**STELLUX - I**

LED STELLUX-I Recess mounted Signature series premium commercial luminaire Available in 4000K & 5700K



Product Description	MRP (₹)
LCTRI-36-CDL	6500
LCTRI-36-TL	6500
LCTRI-36-WW	6500

**STELLUX - P**


LED STELLUX-P Recess mounted Signature series premium commercial luminaire Available in 4000K & 5700K



Product Description	MRP (₹)
LCTRP-36-CDL	7400
LCTRP-36-TL	7400
LCTRP-36-WW	7400

**STELLUX - S**

LED STELLUX-S Recess mounted Signature series premium commercial luminaire Available in 4000K & 5700K



Product Description	MRP (₹)
LCTRS-36-CDL	8200
LCTRS-36-TL	8200
LCTRS-36-WW	8200

**STELLUX - H**

LED STELLUX-H Recess mounted Signature series premium commercial luminaire Available in 4000K & 5700K




Product Description	MRP (₹)
LCTRH-36-CDL	10600
LCTRH-36-TL	10600
LCTRH-36-WW	10600

**POLLUX**

Pollux is a exquisitely designed luminaire which is bound to deliver extra ordinary lumens through its pure form and glare-less light. Recessed full open 2X2 (> 120 Lumen/Watt)

*For Analog and DALI dimming options, please contact CGCEL sales team.*




Product Description	MRP (₹)
LCTLRP-24-FO-CDL	6000
LCTLRP-30-FO-CDL	6500
LCTLRP-36-FO-CDL	7000

**POLARIS NIO - I**

LED Recessed full lit luminaire with glare free uniform illumination with longer life and less maintenance. 18W available in 1 ft x 1 ft, all other wattages in 2 ft x 2 ft (> 100 Lumen/Watt)


*For Analog and DALI dimming options, please contact CGCEL sales team.*



Product Description	MRP (₹)
LCTLRNE-18-CDL(1X1)	2700
LCTLRNE-18-WWW(1X1)	2700
LCTLRNE-18-TL(1X1)	2700
LCTLRNE-24-FO-CDL	4500
LCTLRNE-24-FO-WWW	4500
LCTLRNE-24-FO-TL	4500
LCTLRNE-30-FO-CDL	4800
LCTLRNE-30-FO-WWW	4800
LCTLRNE-30-FO-TL	4800
LCTLRNE-36-FO-CDL	5000
LCTLRNE-36-FO-WWW	5000
LCTLRNE-36-FO-TL	5000

**POLARIS NIO - II**

LED Recessed full lit luminaire with glare free uniform illumination with longer life and less maintenance. Available in 2 ft x 2 ft (> 100 Lumen/Watt)




Product Description	MRP (₹)
CCR-126-50-57-SL-NWH	6000
CCR-126-50-40-SL-NWH	6000
CCR-126-50-30-SL-NWH	6000



## INDOOR LIGHTING

**POLARIS NIO - III**

LED Surface full lit luminaire with glare free uniform illumination with longer life and less maintenance. 18W available in 1 ft x 1 ft, all other wattages in 2 ft x 2 ft (> 100 Lumen/Watt)



Product Description	MRP (₹)
LCTLSNE-18-FO-CDL	3000
LCTLSNE-18-FO-TL	3000
LCTLSNE-18-FO-WW	3000
LCTLSNE-24-FO-CDL	5000
LCTLSNE-24-FO-TL	5000
LCTLSNE-24-FO-WW	5000
LCTLSNE-30-FO-CDL	5500
LCTLSNE-30-FO-TL	5500
LCTLSNE-30-FO-WW	5500
LCTLSNE-36-FO-CDL	6000
LCTLSNE-36-FO-TL	6000
LCTLSNE-36-FO-WW	6000

**SPAN**

SPAN is recessed & surface LED 1 ft x 4 ft Panel ceiling light with high performance, commercial grade solution suitable for hospitals, schools, offices and so much more. (> 100 Lumen/Watt)



Product Description	MRP (₹)
LCTLRNE-40-CDL(1X4)	6000
LCTLRNE-40-TL(1X4)	6000
LCTLRNE-40-WW(1X4)	6000
LCTLSNE-40-CDL(1X4)	6500
LCTLSNE-40-TL(1X4)	6500
LCTLSNE-40-WW(1X4)	6500

**TECHZONE**


Designed with simplicity and attention to detail in mind. This luminaire is perfect for 100 mm recess techzone ceiling.



Product Description	MRP (₹)
LCRTTZN-40-CDL	8200
LCRTTZN-40-WW	8200
LCRTTZN-40-TL	8200

**AURA - I**

Aura I is a edge lit 2 ft x 2 ft slim panel with super bright LED's & highly efficient light-smoothing optics to deliver superior illumination and energy savings year after year

**Product Description**

CCR-127-36-57-SL-NWH

**MRP (₹)**

4500

**AURA - II**

Aura II is edge lit 1 ft x 4 ft slim panel perfect for hospitals, classrooms, offices, and any other work space requiring high quality ambient lighting

**Product Description**

CCR-132-36-57-SL-NWH

**MRP (₹)**

4800



## INDOOR LIGHTING

**VECTOR - I**

Multi angular slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.




New

Product Description	MRP (₹)
LCTLRF1-36-CDL	6000
LCTLRF1-36-TL	6000
LCTLRF1-36-WW	6000

**VECTOR - II**

Merged octagon shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



New

Product Description	MRP (₹)
LCTLRF2-36-CDL	6000
LCTLRF2-36-TL	6000
LCTLRF2-36-WW	6000

**VECTOR - III**

Triangular shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.




New

Product Description	MRP (₹)
LCTLRF3-36-CDL	6000
LCTLRF3-36-TL	6000
LCTLRF3-36-WW	6000

**VECTOR - IV**

Abstract shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.




New

Product Description	MRP (₹)
LCTLRF4-36-CDL	6000
LCTLRF4-36-TL	6000
LCTLRF4-36-WW	6000

**VECTOR - V**


Abstract shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



Product Description	MRP (₹)
LCTLRF5-36-CDL	6000
LCTLRF5-36-TL	6000
LCTLRF5-36-WW	6000

**VECTOR - VI**

Rhombus shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



Product Description	MRP (₹)
LCTLRF6-36-CDL	6000
LCTLRF6-36-TL	6000
LCTLRF6-36-WW	6000

**VECTOR - VII**

Square shaped Slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



Product Description	MRP (₹)
LCTLRF7-36-CDL	6000
LCTLRF7-36-TL	6000
LCTLRF7-36-WW	6000



## INDOOR LIGHTING

**STYLO - Q**


Stylo - Q provides square in circle theme, it creates illusion of ceiling merging with luminaire, as the contrast of two primary shapes create a strong form. Efficacy 100LM/W



Product Description	MRP (₹)
LCDRQ-12-CDL	1500
LCDRQ-12-WW	1500
LCDRQ-12-TL	1500
LCDRQ-15-CDL	1600
LCDRQ-15-WW	1600
LCDRQ-15-TL	1600

**STYLO - S**

Stylo - S comes with sleek injection module plastic body, integral bezelless design which provides the cleanest lines for the minimal effect, diffuser profile ends in ripples that allows light fade towards the edges. Efficacy 100LM/W



Product Description	MRP (₹)
LCDRS-12-CDL	1400
LCDRS-12-WW	1400
LCDRS-12-TL	1400
LCDRS-15-CDL	1500
LCDRS-15-WW	1500
LCDRS-15-TL	1500

**STYLO - O**

Stylo - O bring forth innovative design, circle in square shape offering emboss small panel appearance with sleek aluminum PDC body. Efficacy 100LM/W



Product Description	MRP (₹)
LCDRO-12-CDL	1400
LCDRO-12-WW	1400
LCDRO-12-TL	1400
LCDRO-15-CDL	1500
LCDRO-15-WW	1500
LCDRO-15-TL	1500

**PROXIMA - R**

Proxima-R is a high performance low-height back lit downlighter suited for any modern professional workspace. Robust PDC aluminum housing ensures long life. Available in 5700K, 4000K, 3000K CCT Efficacy 100LM/W

*For Analog and DALI dimming options, please contact CGCEL sales team.*



New

Product Description	MRP (₹)
CDR-204-06-57-SL-NWH	1200
CDR-204-06-40-SL-NWH	1200
CDR-204-06-30-SL-NWH	1200
CDR-205-12-57-SL-NWH	1600
CDR-205-12-40-SL-NWH	1600
CDR-205-12-30-SL-NWH	1600
CDR-205-15-57-SL-NWH	1800
CDR-205-15-40-SL-NWH	1800
CDR-205-15-30-SL-NWH	1800
CDR-206-18-57-SL-NWH	2600
CDR-206-18-40-SL-NWH	2600
CDR-206-18-30-SL-NWH	2600

**PROXIMA - S**

Proxima-S is a high performance low- height downlighter suited for any modern professional workspace. Robust PDC aluminum housing ensures long life. Available in 5700K, 4000K, 3000K CCT Efficacy 100LM/W

*For Analog and DALI dimming options, please contact CGCEL sales team.*



New

Product Description	MRP (₹)
CDR-207-06-57-SL-NWH	1200
CDR-207-06-40-SL-NWH	1200
CDR-207-06-30-SL-NWH	1200
CDR-208-12-57-SL-NWH	1600
CDR-208-12-40-SL-NWH	1600
CDR-208-12-30-SL-NWH	1600
CDR-208-15-57-SL-NWH	1800
CDR-208-15-40-SL-NWH	1800
CDR-208-15-30-SL-NWH	1800
CDR-209-18-57-SL-NWH	2600
CDR-209-18-40-SL-NWH	2600
CDR-209-18-30-SL-NWH	2600

## INDOOR LIGHTING

**PROXIMA - II**

Proxima-II is a high performance low-height back lit downlighter suited for any modern professional workspace. Robust PDC aluminum housing ensures long life. Available in 5700K, 4000K, 3000K CCT Efficacy 100LM/W



Product Description	MRP (₹)
CDR-216-30-57-SL-NWH	3200
CDR-216-30-40-SL-NWH	3200
CDR-216-30-30-SL-NWH	3200
CDR-216-40-57-SL-NWH	4000
CDR-216-40-40-SL-NWH	4000
CDR-216-40-30-SL-NWH	4000



**PEARL ULTIMA - R**


Round recess mounted LED edge lit slim downlight with die-cast aluminum housing finished in premium white powder coating.  
Efficacy 100lm/w



Product Description	MRP (₹)
LSCRM-6W-CDL	850
LSCRM-6W-NW	850
LSCRM-6W-WW	850
LSCRM-12W-CDL	1100
LSCRM-12W-NW	1100
LSCRM-12W-WW	1100
LSCRM-15W-CDL	1400
LSCRM-15W-NW	1400
LSCRM-15W-WW	1400
LSCRM-18W-CDL	1600
LSCRM-18W-NW	1600
LSCRM-18W-WW	1600

**PEARL ULTIMA- S**

Square recess mounted LED edge lit slim downlight with die-cast aluminum housing finished in premium white powder coating.  
Efficacy 100lm/w



Product Description	MRP (₹)
LSCSM-6W-CDL	850
LSCSM-6W-NW	850
LSCSM-6W-WW	850
LSCSM-12W-CDL	1100
LSCSM-12W-NW	1100
LSCSM-12W-WW	1100
LSCSM-15W-CDL	1400
LSCSM-15W-NW	1400
LSCSM-15W-WW	1400
LSCSM-18W-CDL	1600
LSCSM-18W-NW	1600
LSCSM-18W-WW	1600



## INDOOR LIGHTING

**PEARL NIOS - R**


Round surface mounted LED panel. PDC aluminum housing and high translucent frosted plastic diffuser makes it a robust Luminaire. Efficacy 100lm/w



Product Description	MRP (₹)
LCDSPLN-R-06-CDL	1000
LCDSPLN-R-06-NW	1000
LCDSPLN-R-06-WW	1000
LCDSPLN-R-12-CDL	1450
LCDSPLN-R-12-NW	1450
LCDSPLN-R-12-WW	1450
LCDSPLN-R-18-CDL	2000
LCDSPLN-R-18-NW	2000
LCDSPLN-R-18-WW	2000

**PEARL NIOS - S**

Square surface mounted LED panel. PDC aluminum housing and high translucent frosted plastic diffuser makes it a robust Luminaire. Efficacy 100lm/w



Product Description	MRP (₹)
LCDSPLN-S-06-CDL	1000
LCDSPLN-S-06-NW	1000
LCDSPLN-S-06-WW	1000
LCDSPLN-S-12-CDL	1450
LCDSPLN-S-12-NW	1450
LCDSPLN-S-12-WW	1450
LCDSPLN-S-18-CDL	2000
LCDSPLN-S-18-NW	2000
LCDSPLN-S-18-WW	2000

**QUARTZ + R**

Slim design LED recessed round polycarbonate housing down lighter with superior light output and integral driver.  
Efficacy 100lm/w



Product Description	MRP (₹)
LCDEP-06-CDL.	520
LCDEP-06-NW.	520
LCDEP-06-WW	520
LCDEP-09-CDL.	550
LCDEP-09-NW	550
LCDEP-09-WW	550
LCDEP-12-CDL.	850
LCDEP-12-NW	850
LCDEP-12-WW	850
LCDEP-15-CDL.	900
LCDEP-15-NW.	900
LCDEP-15-WW	900
LCDEP-18-CDL.	1280
LCDEP-18-NW.	1280
LCDEP-18-WW.	1280

**QUARTZ + S**

Slim design LED recessed round down lighter polycarbonate housing with superior light output and integral driver.  
Efficacy 100lm/w



Product Description	MRP (₹)
LSDEP-06-CDL.	520
LSDEP-06-NW.	520
LSDEP-06-WW	520
LSDEP-09-CDL.	550
LSDEP-09-NW	550
LSDEP-09-WW	550
LSDEP-12-CDL.	850
LSDEP-12-NW	850
LSDEP-12-WW	850
LSDEP-15-CDL.	900
LSDEP-15-NW.	900
LSDEP-15-WW	900
LSDEP-18-CDL.	1280
LSDEP-18-NW.	1280
LSDEP-18-WW.	1280

## INDOOR LIGHTING

**ROYAL RIMLESS - R**

Royal Rimless - R is a surface mounted LED panel injection molded in thermally conductive engineered plastic - FR V0 grade housing, diffuser with high optically efficient material.




New

Product Description	MRP (₹)
LCRP-06-CDL	550
LCRP-10-CDL	700
LCRP-15-CDL	950
LCRP-20-CDL	1400
LCRP-06-NW	550
LCRP-10-NW	700
LCRP-15-NW	950
LCRP-20-NW	1400
LCRP-06-WW	550
LCRP-10-WW	700
LCRP-15-WW	950
LCRP-20-WW	1400

**ROYAL RIMLESS - S**

Royal Rimless - S is a surface mounted LED panel injection molded in thermally conductive engineered plastic - FR V0 grade housing, diffuser with high optically efficient material.




New

Product Description	MRP (₹)
LSRP-06-CDL	550
LSRP-10-CDL	700
LSRP-15-CDL	950
LSRP-20-CDL	1400
LSRP-06-NW	550
LSRP-10-NW	700
LSRP-15-NW	950
LSRP-20-NW	1400
LSRP-06-WW	550
LSRP-10-WW	700
LSRP-15-WW	950
LSRP-20-WW	1400

**BRIGHT LINEA**


High-quality materials and design. Extruded aluminum housing enhances safety. High quality PC Diffuser. Reliable and robust housing structure, maximize the endurance over the life time Slim Integrated design, easy to install Efficacy : 125 lumen/watt



Product Description	MRP (₹)
CCS-100-20-65-HL2-DP-NWH	850

**TRIMLINE**

Trimline is a robust and high performance batten. This LED luminaire comprises of extruded channel in thermally conductive material. High translucent serrated milky white diffuser is used to get glare free and smooth light distribution. Efficacy : 100 lumen/watt



Product Description	MRP (₹)
LDL-05-CDL	410
LDL-05-NW	410
LDL-05-WW	410
LDL-10-CDL	550
LDL-10-NW	550
LDL-10-WW	550
LDL-20-CDL	800
LDL-20-NW	800
LDL-20-WW	800
LDL-40-CDL	1200
LDL-40-NW	1200
LDL-40-WW	1200

**TRIM LINEA**

Trimline is a PC batten. Compact appearance, simple and versatile in nature makes it as long lasting, efficient solution for offices and other commercial spaces. Efficacy : 100 lumen/watt




Product Description	MRP (₹)
LCTLN-10-CDL	510
LCTLN-10-NW	510
LCTLN-10-WW	510
LCTLN-20-CDL	620
LCTLN-20-WW	620
LCTLN-20-NW	620

## INDOOR LIGHTING

## UNILITE

Compact commercial batten suitable for single T8 LED tube.  
*LED tube to be ordered separately*



Product Description	MRP (₹)
DMLN1LT8-8	250
DMLN1LT8-16	280



# INDUSTRIAL LIGHTING

## INDUSTRIAL LIGHTING

**SURROUND HYPERION**

Very high efficiency round highbay in PDC housing suitable for industrial application. The luminaire has efficacy upto 150Lm/W to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66.



Product Description	MRP (₹)
CIP-320-80-57-60D-HL5-GL-NSR	19000
CIP-320-80-57-90D-HL5-GL-NSR	19000
CIP-320-100-57-60D-HL4-GL-NSR	21000
CIP-320-100-57-90D-HL4-GL-NSR	21000
CIP-320-120-57-60D-HL4-GL-NSR	23000
CIP-320-120-57-90D-HL4-GL-NSR	23000
CIP-320-140-57-60D-HL4-GL-NSR	25000
CIP-320-150-57-60D-HL4-GL-NSR	26000

**SURROUND ULTRA**

High efficiency round highbay in PDC housing suitable for industrial application. The luminaire has efficacy upto 130Lm/W to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66.



Product Description	MRP (₹)
LHB11-80-CDL/60-HPM	15000
LHB11-100-CDL/60-HPM	17000
LHB11-120-CDL/60-HPM	19000
LHB11-140-CDL/60-HPM	21000
LHB11-150-CDL/60-HPM	22000

**SURROUND NEO**

High efficiency round highbay in PDC housing suitable for industrial application. The luminaire has efficacy of 110Lm/w reduce quantity / wattage thereby reducing operational cost. Ingress protection of IP66.



Product Description	MRP (₹)
LHB11-80-CDL/60-M	12000
LHB11-100-CDL/60-M	13000
LHB11-120-CDL/60-M	14000
LHB11-140-CDL/60-M	16000
LHB11-150-CDL/60-M	17000

**JUPITER NEO**

Highbay with innovatively designed heat sink for superior thermal management making it a perfect solution for industrial application. The Luminaire has an efficacy of 110 Lm/w. Ingress protection of IP66.



Product Description	MRP (₹)
LHB-80-CDL/60-M	13000
LHB-100-CDL/60-M	14500
LHB-120-CDL/60-M	16000
LHB-140-CDL/60-M	17000
LHBN-150-CDL/60-M	18000
LHB11-180-CDL/60-M	20000
LHB11-200-CDL/60-M	21500

**SUPRA NEO-I**

Wellglass in PDC Aluminium housing with finless design and excellent thermal management offering high durability and superior performance with energy saving and having efficacy of 110 Lm/w. Ingress protection of IP66.



Product Description	MRP (₹)
LWV12-30-(CDL)	3600
LWV12-35-(CDL)	3800
LWV12-40-(CDL)	4000

**SUPRA ULTRA-I**

High efficacy Wellglass which consumes lesser energy and maintains high lighting levels. Luminaire efficacy of 125Lm/Watt to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66.



New

Product Description	MRP (₹)
LWV12-30-(CDL)-HP	5100
LWV12-35-(CDL)-HP	5300
LWV12-40-(CDL)-HP	5500

**SUPRA NEO-II**

Highly reliable Wellglass with superior technology which consumes lesser energy with high lighting levels. Superior tapered fin design with exceptional thermal management having an efficacy of 110 Lm/w. Ingress protection of IP66.



Product Description	MRP (₹)
LWV12-70-(CDL)	7800




## INDUSTRIAL LIGHTING

**NEPTUNE NEO-II**

PDC Aluminium constructed recessed mounted under canopy luminaire with superior aesthetic finish and high reliability making it an ideal solution for petrol pumps and having efficacy of 110 Lm/w. Ingress protection of IP66. Available in 600mmX 600mm frame




Product Description	MRP (₹)
LCNP-80-CDL/60-M	10000
LCNP-80-CDL/60-M(600) 	12000

**NEPTUNE ULTRA-II**

High efficacy under canopy which consumes lesser energy and maintains high lighting levels. Luminaire efficacy of 125Lm/Watt to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66. Available in 600mmx 600mm frame



Product Description	MRP (₹)
LCNP-80-CD60HPM	12000
LCNP-80-CD60HPM600 	15000

**SUNRISE**

Pressure Die Cast Al housing bulkhead for multiple application. IP65 protected



Product Description	MRP (₹)
LBHE-10-CDL	2100

**STUD**

Perfect for interior and exterior applications within car parks, walkways, stairwells, corridors, Local authorities and housing associations as well as commercial buildings.



Product Description	MRP (₹)
LBHP-10-CDL	1200

# ***BATTEN & LED TUBES***

**SHIELD NEO**

Weatherproof integrated LED Batten suitable for various industrial application in 4 ft for wattage of 40W & 20W. Luminaire has an efficacy of 110 Lm/w. Ingress protection of IP65.



New

Product Description	MRP (₹)
CIS-300-40-57-SL-DP-NGR	4600
CIS-300-20-57-SL-DP-NGR	4200

**SHIELD**

Surface/Suspended waterproof industrial luminaire with polycarbonate housing and diffuser suitable for single and twin 4 ft T8 tube.


Ingress protection of IP65.  
LED tubes to be ordered separately.



Product Description	MRP (₹)
IPFC111LT8-16	1900
IPFC112LT8-16	2200

**SHELTER**

High Performance integrated IP20 LED Batten to create a sustainable lighting environment with surface/suspended mounting having an efficacy of 110 Lm/w.

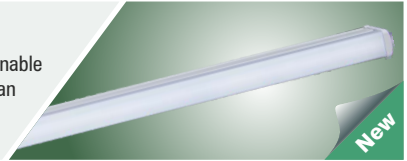


New

Product Description	MRP (₹)
CIS-305-40-57-SL-DP-NWH	2700

**SHELTER ULTRA**

High efficacy integrated IP20 LED Batten to create a sustainable lighting environment with surface/suspended mounting having an efficacy of 120 Lm/Watt

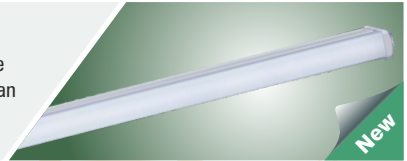

New

Product Description	MRP (₹)
CIS-305-40-57-HL2-DP-NWH	3300

**ECO**

Compact industrial batten suitable for single T8 LED tube  
LED tubes to be ordered separately



Product Description	MRP (₹)
DJJB12LT8-20	350

## BATTEN &amp; LED TUBES

**ECO-I**


Highly robust Industrial Box type luminaire suitable for single and twin T8 LED Tube  
*LED tubes to be ordered separately*



Product Description	MRP (₹)
IGP161LT8-16	550
IGP162LT8-16	600

**ULTRON**


LED polycarbonate T8 tube with in built driver with metal heat sink.  
 Double sided connection.

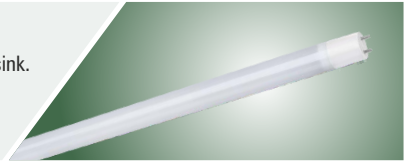

Product Description	MRP (₹)
LT8-8-565-2	600
LT8-20-865-(2)	650

**CRYSTA**


LED Glass T8 tube with in built driver.  
 Double sided connection.

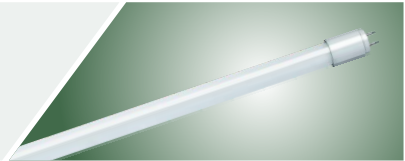

Product Description	MRP (₹)
LGT8-16-865-2	450
LGT8-20-865-2	500

**SECURE**

LED T8 tube with extruded Al body, PC diffuser and inbuilt driver  
 Double sided connection.

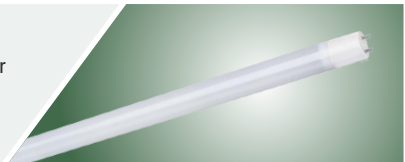

Product Description	MRP (₹)
LTT8-8	700
LTT8-16	750
LTT8-20	800





***CLEANROOM LIGHTING***

**CLEANLUX I**

Recessed mounted bottom opening LED Cleanroom luminaire (2X2).  
CRCA powder coated housing. SS Frame available on request. IP 54  
LCBOR-24-CDL is (1x1)



Product Description	MRP (₹)
LCBOR-24-CDL	6500
LCBOR-40-CDL	10000
LCBOR-50-CDL	12000
LCBOR-60-CDL	12500

**CLEANLUX II**

Recessed mounted bottom opening LED Cleanroom luminaire (1X4).  
CRCA powder coated housing. SS Frame available on request. IP 54



Product Description	MRP (₹)
LCBOR-40-CDL(1X4)	11000
LCBOR-50-CDL(1X4)	13000
LCBOR-60-CDL(1X4)	18000

**CLEANLUX III**

Recessed mounted bottom opening LED Cleanroom luminaire (1X2).  
CRCA powder coated housing. SS Frame available on request. IP 54



Product Description	MRP (₹)
LCBOR-40-CDL(1X2)	8000

**CLEANLUX IV**

Recessed mounted top opening LED Cleanroom luminaire (2X2).  
CRCA powder coated housing. SS Frame available on request. IP 65  
LCTOR-24-CDL is (1x1)



Product Description	MRP (₹)
LCTOR-24-CDL	8500
LCTOR-40-CDL	12500
LCTOR-50-CDL	14500
LCTOR-60-CDL	15500

The background of the entire page is a photograph of a large industrial facility at night. The facility is a multi-story building with a complex network of pipes, walkways, and structural beams. Numerous bright lights are scattered throughout the scene, illuminating the structure and creating a high-contrast, industrial atmosphere. The lights appear to be part of the facility's lighting system, which is the focus of the advertisement.

# **FLAMEPROOF LIGHTING**




## FLAMEPROOF LIGHTING

**FIAMMA I**

CIMFR certified LED flameproof batten suitable for single and twin T8 tube of 8W. Recommended for Gas/Vapor group of IIA & IIB and Zone 1 & 2. IP65 Protected.

*LED tubes to be ordered separately*




Product Description	MRP (₹)
EXTN1LT8-8	10000
EXTN2LT8-8	11000

**FIAMMA II**

CIMFR certified LED flameproof batten suitable for single and twin T8 tube of 16W/20W. Recommended for Gas/Vapor group of IIA & IIB and Zone 1 & 2. IP65 Protected.

*LED tubes to be ordered separately*



Product Description	MRP (₹)
EXTN1LT8-16/20	11500
EXTN2LT8-16/20	12500

**GLAZE PRO**

CIMFR certified LED flameproof Wellglass in die cast Al housing with heat resistant toughened glass. Recommended for Gas/Vapor group of IIA & IIB and Zone 1 & 2. IP65 protected.



Product Description	MRP (₹)
FWL1315-30-CDL	11500
FWL1315-40-CDL	13500
FWL1315-60-CDL	14500

# STREET LIGHTING

**ASTRA NEO**


ASTRA NEO LED streetlight made up of pressure die cast housing with toughened glass and high power LEDs with option of secondary optic with IP66 protection. External SPD to be ordered separately.  
Efficacy : 110LM/W



Product Description	MRP (₹)
LSTS-20-CDL-M	2200
LSTS-20-CDL/NL-M	2100
LSTS-25-CDL-M	2300
LSTS-25-CDL/NL-M	2200
LSTS-30-CDL-M	3100
LSTS-30-CDL/NL-M	3000

**FREEDOM NEO**

FREEDOM NEO LED streetlight made up of pressure die cast housing with toughened glass and high power LEDs with option of secondary optic with IP65 protection. External SPD to be ordered separately.  
Efficacy : 110LM/W



Product Description	MRP (₹)
LSTS-36-CDL-M <span style="color: green; font-weight: bold;">New</span>	5000
LSTS-40-CDL-M	5200
LSTS-45-CDL-M	5500

**NEXUS NEO**


NEXUS NEO LED streetlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 Protection. 10KV SPD included.  
Efficacy : 110LM/W



Product Description	MRP (₹)
LSTP-60-CDL-M	7000
LSTP-72-CDL-M	8000
LSTP-90-CDL-M	10000

**NEXUS STAR NEO**

NEXUST STAR NEO LED streetlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. 10KV SPD included.  
Efficacy : 110LM/W




Product Description	MRP (₹)
LSTP-100-CDL-M	11000
LSTP-120-CDL-M	14000
LSTP-150-CDL-M <span style="color: green; font-weight: bold;">New</span>	16000

## STREET LIGHTING

**PINNACLE NEO**

Pinnacle NEO LED streetlight made up of pressure die cast aluminum housing with polycarbonate cover and high power LEDs and secondary lenses with IP66 protection. SPD to be ordered separately. Efficacy : 100LM/W



Product Description	MRP (₹)
LST-20-CDL-M	2400
LST-20-CDL-M/NL	2300
LST-25-CDL-M	3000
LST-25-CDL-M/NL	2800

**PINNACLE PLUS**


Pinnacle Plus LED streetlight made up of pressure die cast aluminium housing with integrated polycarbonate lens, high power Ceramic LEDs with IP66 protection. 10KV SPD included. Efficacy : 110LM/W



Product Description	MRP (₹)
LST-60-CDL	6800
LST-70-CDL	7800

**ORION NEO**

Orion Neo LED streetlight made up of pressure die cast aluminum housing with polycarbonate cover and high power LEDs and secondary lenses with IP66 protection. 10KV SPD included. Efficacy : 110LM/W



New

Product Description	MRP (₹)
LST-60-CDL-M	6500
LST-70-CDL-M	7500
LST-90-CDL-M	9500

**VEGA**

New generation LED street light with highly optimised and efficient lighting distribution made from Die cast aluminum housing, high power ceramic LEDs with integrated lens and IP66 protection. Efficacy : 110LM/W



New

Product Description	MRP (₹)
LSTV-45-CDL	5500

**HAWK NEO**

Aerodynamically designed street light having inbuilt tilting angle arrangement with excellent thermal management, made from aluminium die cast housing, high power LEDs and secondary lenses with IP66 protection. Efficacy of >110LPW. 10KV SPD included.



New

Product Description	MRP (₹)
LSTN1-170-CDL-A-M	22000
LSTN1-180-CDL-A-M	23000

**HAWK II NEO**

Aerodynamically designed street light having inbuilt tilting angle arrangement with excellent thermal management, made from aluminium die cast housing, high power LEDs and secondary lenses with IP66 protection. System efficacy of >110LPW. 10KV SPD included.



New

Product Description	MRP (₹)
LSTN-200-CDL-A-M	24000
LSTN-220-CDL-A-M	26000
LSTN-250-CDL-A-M	29000

**HAWK II NEO (HP)**

Aerodynamically designed street light having inbuilt tilting angle arrangement with excellent thermal management, made from aluminium die cast housing, high power LEDs and secondary lenses with IP66 protection. System efficacy of >125LPW. 10KV SPD included.



New

Product Description	MRP (₹)
LSTN-200-CDL-AHP-M	31000
LSTN-220-CDL-AHP-M	33500
LSTN-250-CDL-AHP-M	35000





## ***FLOOD LIGHTING***

## FLOOD LIGHTING

## PROFILE+ NEO

LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. Option for 3000K. 10KV SPD included.



Product Description	MRP (₹)
LFL-50-CDL/60-M	5800
LFL-60-CDL/60-M	6200
LFL-80-CDL/60-M	9000

## PLUTO NEO

LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy  $\geq$  110LPW. Option for 3000K. 10KV SPD included.



Product Description	MRP (₹)
LFLN-120-CDL/60-M	12800
LFLN-135-CDL/60-M	13200
LFLN-150-CDL/60-M	15000
LFLN-180-CDL/60-M	19500
LFLN-200-CDL/60-M	20500

## SECURE NEO


LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy of  $\geq$  110LPW. Option for 3000K. 10KV SPD included.



Product Description	MRP (₹)
LSFO-250-CDL/60-M	32000
LSFO-300-CDL/60-M	35000
LSFO-350-CDL/60-M	38000

## MAGPIE NEO

Unique modular LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. Option for 3000K. 10KV SPD included.



Product Description	MRP (₹)
LFLPI-250-CDL/60-M	32000
LFLPI-400-CDL/60-M	48000
LFLPI-500-CDL/60-M	60000

**LANDSCAPE LIGHTING**



## LANDSCAPE LIGHTING

**FERN**

Decorative indirect post top for garden & landscape lighting with IP 65 protection. Resistant to impact and corrosion. Anti Glare and uniform distribution.



Product Description	MRP (₹)
LPTOI-45-CDL	22000
LPTOI-45-T	22000

**MAPLE**

Decorative Post top for 360° indirect light with IP 65 protection. Resistant to impact and corrosion. Glare-free and better uniformity.



Product Description	MRP (₹)
LPTO-40-CDL	13000
LPTO-40-CDL-M	12000
LPTO-60-CDL	17500
LPTO-60-CDL-M	16500

**NEBULA**

IP65 Rated LED Post Top with, moonlight effect and efficient light distribution. Also available with integrated decorative pole on request.



Product Description	MRP (₹)
LPTM-40-CDL	10000

**HERITAGE**

IP65 Rated LED Post Top ideal to lit up parks, garden ways and heritage sites.



Product Description	MRP (₹)
LPTH-20-CDL	7500
LPTH-20-WW	7500

## LANDSCAPE LIGHTING

**TERRAIN**

TERRAIN Post Top lantern is a weather proof indirect lighting solution having improved horizontal uniformity, with reduced glare and improved lighting control.



New

**Product Description**

LPTC-40-CDL

**MRP (₹)**

11000

**EMPIRE**

IP66 Rated Decorative Street Light for garden ways and other City Beautification Applications.

**Product Description**

LPTE-60-CDL

LPTE-120-CDL

**MRP (₹)**

24500

28500

**TWISTER**

IP65 Rated LED Bollard with robust design and efficient light distribution.

**Product Description**

LBLTW-10-CDL

LBLTW-10-WW

**MRP (₹)**

5200

5400

**SYRUS**

IP65 Rated LED Bollard with robust design and efficient light distribution.

**Product Description**

LBLSR-10-CDL

LBLSR-10-WW

**MRP (₹)**

4600

4800

## LANDSCAPE LIGHTING

**LIARA**

IP65 rated Inverted Pyramid Tripod type LED Bollard with soft 360 deg light distribution.

**Product Description**

LBSN-10-CDL

**MRP (₹)**

8000

**MAYA I**

Pressure die cast powder coated housing with PC diffuser. Efficient high output LED with IP 66 protection.

**Product Description**

LBLA1-10-CDL

**MRP (₹)**

4000

**MAYA II**

Pressure die cast powder coated housing with PC diffuser. Efficient high output LED with IP 66 protection.

**Product Description**

LBLA2-10-CDL

**MRP (₹)**

4200

**MAYA III**

Pressure die cast powder coated housing with PC diffuser. Efficient high output LED with IP 66 protection.

**Product Description**

LBLA3-10-CDL

**MRP (₹)**

4500

**BEACON**

IP65 Rated LED Step Light for Outdoor Applications.

**Product Description**

LSL-6-CDL

**MRP (₹)**

2400

LSL-6-VVV

2600

**TWILIGHT**

LED outdoor UP-DOWN light with IP65 protection  
Available with 30000K & 57000K



Product Description	MRP (₹)
LUPDN-10-CDL	3600
LUPDN-10-WW	3800



Crompton  
SolarLED

# SOLAR LED LIGHTING

Crompton  
SolarLED



# All-In-One **SOLAR** STREET LIGHTS



**EASY INSTALLATION**



**EASY MAINTENANCE**



**LONG LIFE**

SOLAR  
STREET LIGHT

**HELIUS I**

Smart integrated Solar All In One Street Light with Highest Ever system efficacy of 170Lum/W, MPPT Charge Controller, LiFePO4 battery, Mono Crystalline Solar Panel, PIR motion sensor, easy installation  
**MOQ : 20 Nos**



Product Description	System Wattage	Solar Panel	Battery	MRP (₹)
CSADHMP17CDL	17	40	12.8V 20Ah	69000
CSADHMP20CDL	20	40	12.8V 20Ah	70000
CSADHMP25CDL	25	45	12.8V 21Ah	76000
CSADHMP30CDL	30	60	12.8V 24Ah	84500
CSADHMP40CDL	40	60	12.8V 27Ah	107000
CSADHMP50CDL	50	80	12.8V 36Ah	113000
CSADHMP60CDL	60	100	12.8V 42Ah	132000

**HELIUS II**

Smart Integrated Solar All In One with > 140Lum/W, MPPT Charge Controller, Tilttable LED panel, Adjustable AIO mounting angle, Mono Crystalline Solar Panel, PIR motion Sensor, easy to install  
**MOQ : 20 Nos**



Product Description	System Wattage	Solar Panel	Battery	MRP (₹)
CSADEMPS09CDL	9	40	12.8V 10Ah	42000
CSADEMPS12CDL	12	40	12.8V 12Ah	46000
CSADEMPS15CDL	15	40	12.8V 15Ah	49000
CSADEMPS18CDL	18	50	12.8V 18Ah	54000
CSADEMPS20CDL	20	60	12.8V 20Ah	68000
CSADEMPS25CDL	25	75	12.8V 24Ah	74000
CSADEMPS30CDL	30	75	12.8V 30Ah	82000
CSADEMPS40CDL	40	100	12.8V 36Ah	103000
CSADEMPS50CDL	50	120	12.8V 48Ah	108000
CSADEMPS60CDL	60	150	12.8V 54Ah	126000

**Terms & Conditions**

1. Excludes installation charges
2. Taxes, as applicable
3. Warranty as per company's T&C
4. Solar system performance varies from location to location.  
Please contact our nearest branch office for appropriate technical parameters w.r.t. Battery & panel sizing



**HELIUS III**

Smart integrated Solar All In One Street Light with 120Lum/W, MPPT Charge Controller, LiFePO4 battery, Mono Crystalline Solar Panel, PIR motion sensor, easy installation

**MOQ : 20 Nos**



Product Description	System Wattage	Solar Panel	Battery	MRP (₹)
CSADSMP09CDL	9	30	12.8V 9Ah	42000
CSADSMP12CDL	12	30	12.8V 9Ah	43000
CSADSMP15CDL	15	30	12.8V 10Ah	45000
CSADSMP20CDL	20	40	12.8V 20Ah	58000
CSADSMP25CDL	25	45	12.8V 21Ah	60000
CSADSMP30CDL	30	60	12.8V 24Ah	66000
CSADSMP40CDL	40	60	12.8V 27Ah	89000
CSADSMP50CDL	50	80	12.8V 36Ah	105000
CSADSMP60CDL	60	100	12.8V 42Ah	115000

**HELIUS IV**

Smart integrated Solar All In One Street Light with >100Lum/W, PWM Charge Controller, Li Ion battery, Mono Crystalline Solar Panel, PIR motion sensor, easy installation

**MOQ : 20 Nos**




Product Description	System Wattage	Solar Panel	Battery	MRP (₹)
CSADSPI09CDL	9	40	11.1V 11Ah	36000
CSADSPI12CDL	12	40	11.1V 13Ah	38000
CSADSPI15CDL	15	40	11.1V 15Ah	40000
CSADSPI18CDL	18	50	11.1V 19.8Ah	48000
CSADSPI20CDL	20	60	11.1V 23.4Ah	54000
CSADSPI25CDL	25	75	11.1V 26Ah	58000
CSADSPI30CDL	30	75	11.1V 32Ah	64000
CSADSPI40CDL	40	100	11.1V 41.6Ah	84000
CSADSPI50CDL	50	120	11.1V 52Ah	89000

5. Poles (Tubular / octagonal) can be provided on request
6. System Health monitor / control system via Bluetooth / Wi-fi can be provided on request
7. Higher Wattage systems can also be provided on request
8. Pictures shown are for representation purpose only

# ***HIGH MAST & POLES***

## BASIC WIND SPEED IN m/s


(Based on past 50 years record available)

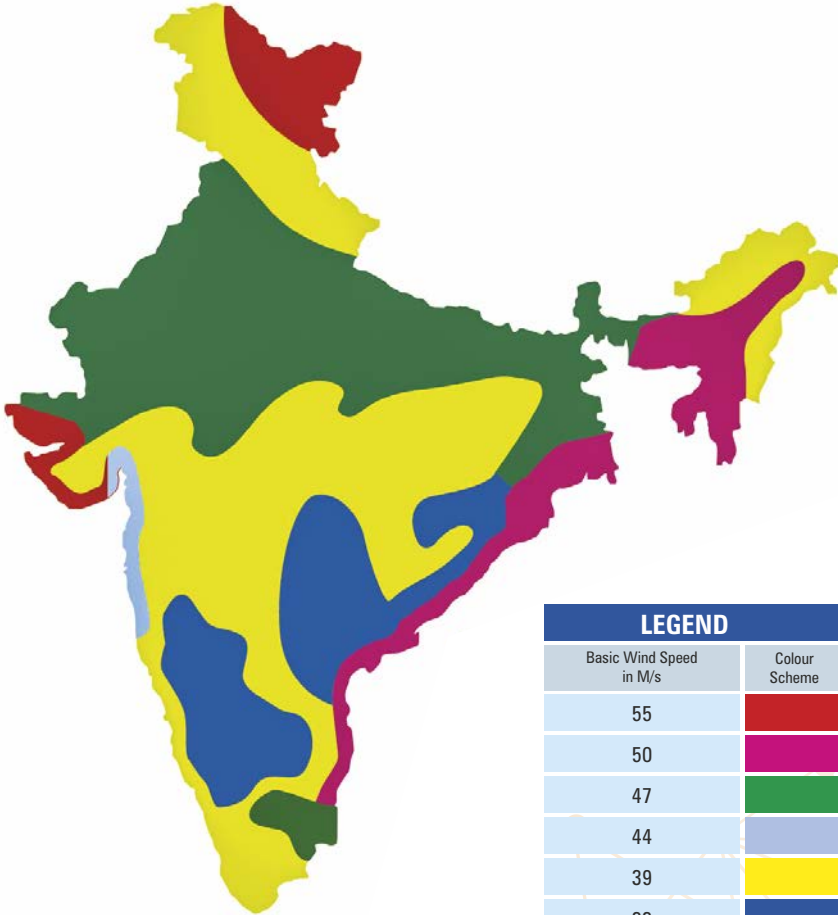

### BASIC WIND SPEED

India is a vast country with diverse climatic conditions. Wind speed at various locations change as per conditions. Based on past 50 years record of basic wind speed. We provide high mast structure that sustains the basic wind speed of the location and head loads.

## TYPICAL BASE COMPARTMENT OF A HIGH MAST

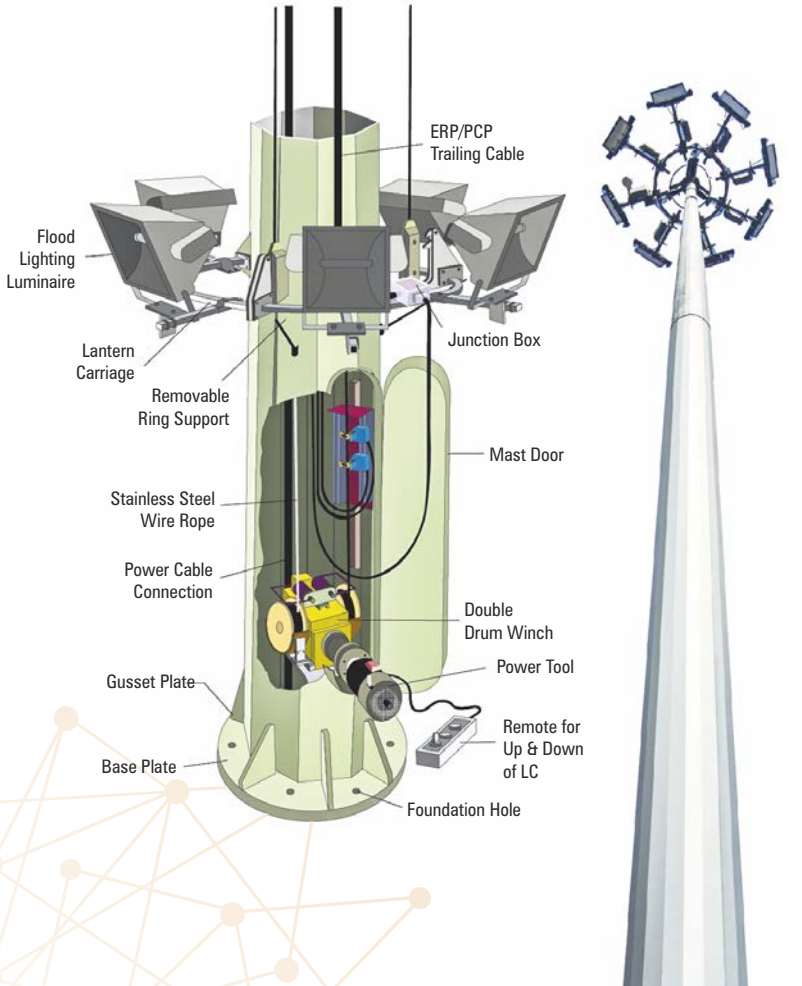

## HIGH MAST

High Mast lighting as a concept in area lighting is being preferred over conventional lighting especially where large areas are to be illuminated without the need for numerous lighting columns. High Mast lighting is ideal for industrial and commercial areas, docks, airports, stations, car parks and hazardous areas.

Height of Mast	12.5 Mtr	16 Mtr	20 Mtr	25 Mtr	30 Mtr
Cat ref	HM-12.5B-LM-ACC	HM-16A-LM-ACC	HM-20A-LM-ACC	HM-25A-LM-ACC	HM-30B-LM-ACC
Material of Construction	BSEN 10025	BSEN 10025	BSEN 10025	BSEN 10025	BSEN 10025
Sectional Thickness	Top : 3 mm Bottom: 3 mm	Top : 3 mm Bottom : 4 mm	Top : 3 mm Bottom : 4 mm	Top : 3 mm Middle: 4 mm Bottom: 5 mm	Top : 4 mm Middle: 4 mm Bottom: 5 mm
Bottom (A/F)	360 mm	360 mm	410 mm	460 mm	600 mm
Top (A/F)	150 mm	150 mm	150 mm	150 mm	150 mm
<b>Lantern Carriage</b>					
Luminaries	6 Nos	9 Nos	12 Nos	12 Nos	12 Nos
Orientation	Symmetrical	Symmetrical	Symmetrical	Symmetrical	Symmetrical
Number of arms	6 Arms	9 Arms	6 Arms	6 Arms	6 Arms
<b>Dynamic Loading</b>					
Wind speed	180 kmph	180 kmph	180 kmph	180 kmph	180 kmph
Type	Double Drum	Double Drum	Double Drum	Double Drum	Double Drum
<b>Stainless Steel Wire Rope</b>					
Grade	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316
Construction	7 /19	7 /19	7 /19	7 /19	7 /19
Number of ropes	2 Wire Rope System	2 For Winch 3 for Lantern Carriage	2 For Winch 3 for Lantern Carriage	2 For Winch 3 for Lantern Carriage	2 For Winch 3 for Lantern Carriage
Diameter	6 mm	6 mm	6 mm	6 mm	6 mm
Breaking Load capacity	2350 kg	2350 kg	2350 kg	2350 kg	2350 kg
<b>Trailing Cable</b>					
Conductor	5 Core 2.5 Sq mm	5 Core 2.5 Sq mm	5 Core 2.5 Sq mm	5 Core 2.5 Sq mm	5 Core 2.5 Sq mm
Insulation	Flexible	Flexible	Flexible	Flexible	Flexible
No. of circuits per mast	One	One	One	One	One
<b>Power Tool</b>					
Input Supply	415 V	415 V	415 V	415 V	415 V
Method of operation	Integral Motor	Integral Motor	Integral Motor	Integral Motor	Integral Motor

- Note:** 1. For wind speed other than 180 kmph; the High mast can be designed on request  
2. The above mast are considered for Symmetrical orientation however Asymmetrical can also be provided on request.

## OCTAGONAL POLES

## OCTAGONAL POLES

Octagonal Poles are available from 3 mtrs to 12 mtrs height. Street light poles can have single arm as well as double arm brackets. Poles are hot dip galvanized.

Height Of Poles	5 Mtr	7 Mtr	9 Mtr	10 Mtr	11 Mtr	12 Mtr
Cat ref	HM-1105P	HM-1107P	HM-1109P	HM-1110P	HM-1111P	HM-1112P
Material of	BSEN 10025	BSEN 10025	BSEN 10025	BSEN 10025	BSEN 10025	BSEN 10025
Metal Protection Treatment	Hot Dip Galvanized	Hot Dip Galvanized	Hot Dip Galvanized	Hot Dip Galvanized	Hot Dip Galvanized	Hot Dip Galvanized
Thickness of Galvanization	65 microns	65 microns	65 microns	65 microns	65 microns	65 microns
Thickness of Sheet	3 mm	3 mm	3 mm	3 mm	3 mm	3 mm
Thickness of Base Plate	12 mm	16 mm	16 mm	16 mm	20 mm	20 mm
Bottom Dia	130 mm	135 mm	155 mm	175 mm	210 mm	230 mm
Top Dia	70 mm	70 mm	70 mm	70 mm	90 mm	90 mm
No of FDB Bolts	4	4	4	4	4	4

**Note:** 3mtr, 4mtr and 6 mtr Octagonal poles are also available on request





**Advantages of GRP poles:** These are high corrosion resistance poles and are safe in accidents. These poles are light in weight and fast and easy for installation. GRP poles are electrically non conductive.

**Manufacture / Construction:** The GRP Pole will be made from a minimum of 62 to 70% electrical glass roving Encapsulated in a maximum of 30% high temperature cured specially formulated corrosion resistant unfilled epoxy resin matrix. The dielectric rating of the material will be at least 5k V / mm. The GRP Pole will be constructed from continuous electrical glass rovings. The GRP Pole shall be made via the filament winding process on a 4-axis CNC winding machine using PLC to control machine movements. Winding shall be done in such a way that GRP Pole has desired stiffness and strength. Substitution by alternate manufacturing process will not be permitted.

**Thickness:** GRP Pole shall have a minimum thickness of 6 mm up to 7mtr. besides what may be required to achieve the loading and safety specified in Clause 3.0

**Flame Resistance:** GRP Pole will not contain chlorine (or any halogen) or other toxic materials in excess of trace Levels and always less than safe OSHA (or equivalent) limits. When subjected to 2 consecutive 60 seconds flame Application, it must self extinguish after the last flame application

**Surface Finish:** GRP Pole will be provided with architecturally pleasing finish. It shall be provided with at least 1 layer of 2-part primer and at least 1 layer of premium grade 2-part polyurethane finish. GRP Pole will be free from defects, commercially practicable in color, shall be completely opaque, shall have a minimum density of 1.8 and other physical characteristics / properties mentioned below. In general, the GRP Pole shall be free from nicks and burrs

**Color:** GRP Pole will be supplied according to above color specification with 50-micron thickness done by the application of air-spray only

**Applicable Standards:** FES: 057L-1999, ANSI C136





Landscape lighting forms an integral part of modern downtown and often provides "Signature" appearances. Designing an effective Landscape demands selecting right products that blend with the architecture and tune themselves with the surroundings. Modern urbanscape areas comprising of taller building, commercial spaces, recreational areas, areas of heritage importance and waterfronts use more and more landscape lighting to create an alluring environment. Crompton products combines with architecture to give any area a signature daytime appearance while providing effective night-time brilliance.

*\* Poles available on request*

## Lighting Control - Indoor Segment

Improved energy efficiency and flexibility is driving the need for greater use of lighting control

### Types of Control System


- Occupancy-based control
- Daylight harvesting and dimming
- Intelligent lighting control System
- Wireless Control
- Power over Ethernet (PoE)



\* Please contact nearest branch for assistance in designing the project.

## Lighting Controls - Outdoor Segment

- 1 Group Dimming Solutions
- 2 CCMS Solutions
- 3 Individual Light Control

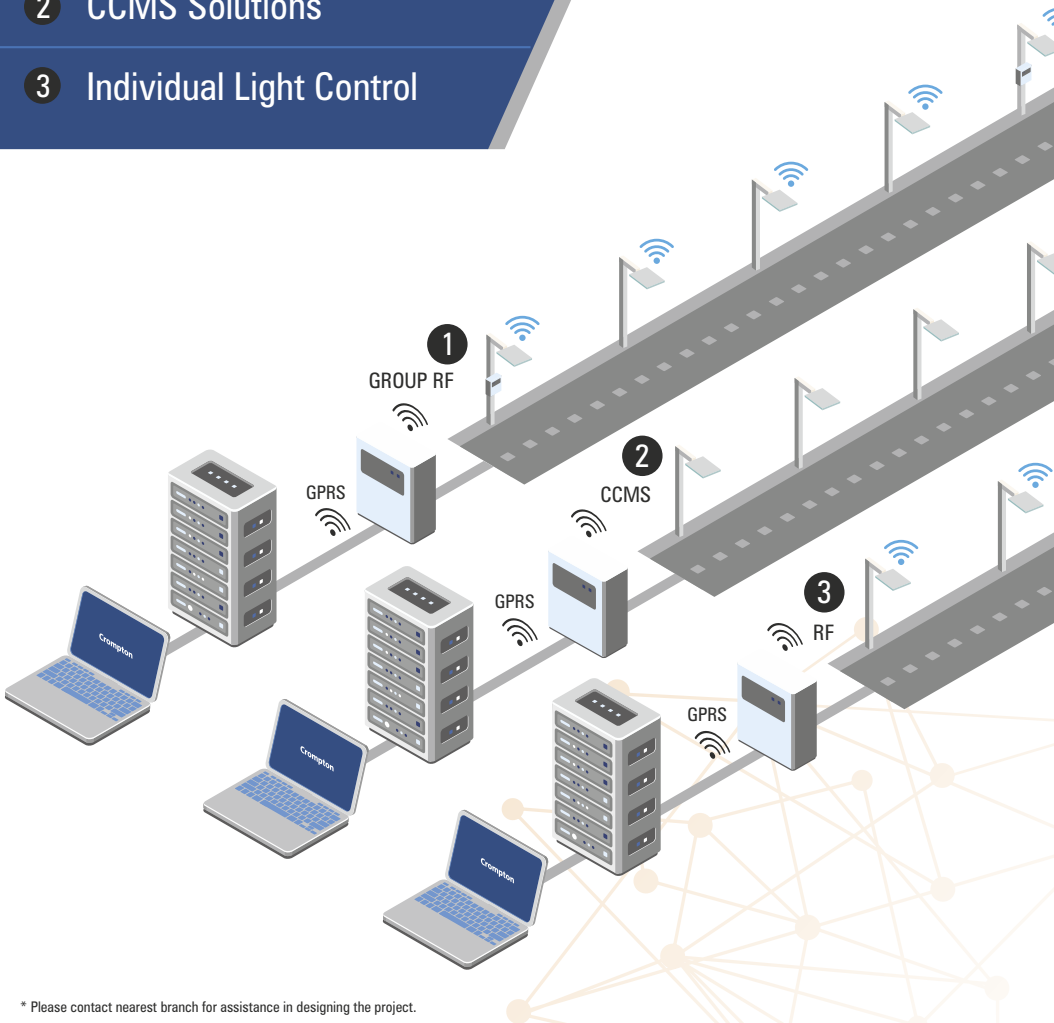

\* Please contact nearest branch for assistance in designing the project.

## LED OUTDOOR ACCESSORIES

## LED OUTDOOR DRIVERS



Product Description	Wattage	MRP (₹)
SODVES-24-700-20W	20W	920
SODRVES-36-600-25W	25W	1000
SODQL1-54-700-40W	40W	1900
SODQL-65-700-45W	45W	2000

## LED OUTDOOR DRIVERS



Product Description	Wattage	MRP (₹)
X075C070V107FNY1B0	75W	2400
X100C070V143FNY1B0	100W	3400
X150C070V210FNI1B0	150W	3600

## SURGE PROTECTION DEVICES



Product Description	Voltage	MRP (₹)
SRPS-5K-440	5KV	200

Surge protection devices compatible with industrial & outdoor LED fixtures upto rated power of 75W

## SURGE PROTECTION DEVICES



Product Description	Voltage	MRP (₹)
SRPS-HP-5K-440	5KV	250

Surge protection devices compatible with industrial & outdoor LED fixtures with rated power above 75W & upto 150W

## SURGE PROTECTION DEVICES



Product Description	Voltage	MRP (₹)
SRPSQ-10KV/5KA-440	10KV	600

Surge protection devices compatible with industrial & outdoor LED fixtures.

## PHASED OUT PRODUCTS

<b>INDOOR LIGHTING</b>	LCSR-06-CDL	LHB11-110-CDL/60	LSTP-60-CDL
LCL-07-CDL	LCSR-12-CDL	LHB11-140-CDL/60	LSTP-72-CDL
LCL-14-CDL	LSDRN-24W-CDL/WW	LHB-90-CDL/60	LSTS-30-CDL
LCTRDI-36-CDL	LSDSN-24W-CDL/WW	LHB-100-CDL/60	LSTS-40-CDL
LCTRQ1-36-CDL	LCDE-06-CDL	LHB-120-CDL/60	LSTS-45-CDL-1
LCTRQ2-36-CDL	LCDE-09-CDL	LHB-135-CDL/60	LSTS-12-CDL
LCTLRN-18-FO-CDL	LCDE-12-CDL	LHBN-150-CDL/60	LSTS-15-CDL
LCTLRN-24-FO-CDL	LCDE-15-CDL	LHB-200-CDL/60	LSTS-18-CDL
LCTLRN-30-FO-CDL	LCDE-18-CDL	LHB-250-CDL/60	LSTS-25-CDL
LCTLRN-36-FO-CDL	LSDE-06-CDL	LHB-300-CDL/60	<b>FLOOD LIGHTING</b>
LCTLRN-50-FO-CDL	LSDE-09-CDL	LHB-350-CDL/60	LFLN11-30-CDL
LCTLSN-36-CDL	LSDE-12-CDL	LHBL-60-CDL	LFLN11-35-CDL/60
LCTLRN-36-CDL	LSDE-15-CDL	LHBL-90-CDL	LFL-50-CDL
LCTLRN-18-CDL	LSDE-18-CDL	LHBL-120-CDL	LFL-60-CDL/60
LCTLSN-18-CDL	LCTL-18-CDL	LCNR-80-CDL	LFL-80-CDL/60
LCTLRN-24-CDL	LCTL-9-CDL	LCNP-80-CDL	LFLN-90-CDL/60
LCTLSN-24-CDL	LCCLB08-CDL	LCNP-80-CDL(600)	LFLN-100-CDL/60
LCTLRN-40-CDL(1X4)	LCCLB16-CDL	LWV11-36-CDL/RFR	LFLN-120-CDL/60
LCTLSN-40-CDL(1X4)	LCCLB24-CDL	IGP131LT8-16	LFLN-135-CDL/60
LCSRR-4-CDL/TL/WW	LPLLA-18-CDL	IGP132LT8-16	LFLN-150-CDL/60
LCSRR-6-CDL/TL/WW	LST205050CDL/BL/WW	LPFC-18-CDL	LSFO-170-CDL/60
LCSRR-4-CDL/TL/WW	LST205050CDL/RGB	LPFC-36-CDL	LSFO-200-CDL/60
LCSRR-6-CDL/TL/WW	LST655050CDL/BL/WW	LBH-10-CDL	LSFO-250-CDL/60
LCDN-12-CDL/TL/WW	LST655050CDL/RGB	IBFN100-15-CDL	LSFO-300-CDL/60
LCDN-15-CDL/TL/WW	<b>INDUSTRIAL LIGHTING</b>	<b>STREET LIGHTING</b>	LSFO-350-CDL/60
LCDN-18-CDL/TL/WW	LWV12-35-CDL	LSTN-170-CDL-A	LFLN11-70-CDL/60
LSDN-12-CDL/TL/WW	LWV12-35-CDL-CPC	LSTN-200-CDL-A	LFLN11-110-CDL/60
LSDN-15-CDL/TL/WW	LWV12-35-CDL-DPC	LSTN-220-CDL-A	LFLN11-140-CDL/60
LSDN-18-CDL/TL/WW	LWV12-70-CDL	LSTN-250-CDL-A	LFLPI-200-CDL/60
LCDN-30-CDL/TL/WW	LWVLT-40-CDL	LSTP-90-CDL	LFLPI-250-CDL / 60
LCDN-40-CDL/TL/WW	LHB11-35-CDL/60	LSTP-45-CDL	
LCDN-50-CDL/TL/WW	LHB11-70-CDL/60		

### Applicable for LED Luminaires / LED Lamps

- MRP indicates Maximum Retail Price. Product can't be sold above MRP. Taxes and local levies as applicable is inclusive.
- Prices are in Indian Rupees.
- Prices of all LED luminaires in this price list are for standard luminaire.
- Prices are inclusive of GST as per prevailing rate at the time of supply. Any statutory variation will be to purchaser's account.
- Goods are dispatched by us on Purchaser's risk. All claims for loss, damage or shortage will be filed by the Purchasers directly with the carriers.
- Orders should be placed in multiples of case lot.
- Items other than those included in this price list are withdrawn from the range.
- This pricelist supersedes our pricelist dated 1st January 2018.
- All fixtures will be supplied as per our normal specifications. For additional features, please contact the nearest local office for details.
- Continuous design improvement is a routine practice at Crompton. Data provided may change without any prior information. Customers are advised to reconfirm the data or product dimensions before purchase at our local offices.
- Prices are subject to change without prior notice.
- All orders shall be placed in writing.
- Company reserves right to issue amendments, which may arise due to any errors in the price list.

CARE HAS BEEN TAKEN TO ENSURE THAT THE INFORMATION CONTAINED WITHIN IS CORRECT. HOWEVER, OWING TO CONTINUOUS INNOVATIONS AND IMPROVEMENTS THE ACTUAL PRODUCT WHEN SUPPLIED, MAY DIFFER FROM THE DETAILS GIVEN HEREIN.

PHOTOGRAPHS SHOWN HEREIN ARE INDICATIVE. PLEASE CHECK WITH NEAREST SALES OFFICE FOR THE ACTUAL PRODUCT.

CROMPTON RESERVES THE RIGHTS TO MAKE CHANGES IN THE DATA / DETAILS WITHOUT PRIOR NOTICE.

Branch	Phone No.
<b>East Region</b>	
<b>Kolkata</b> : 50, Chowringhee Road, 1st Floor Rear Block, Kolkata - 700071, West Bengal	033-4051900
<b>Guwahati</b> : 3rd Floor,shubham Velocity, Hanuram Boro Path Walford, GS Road, Guwahati, Assam- 781005	9678085875
<b>Bhubaneswar</b> : Crompton Greaves Consumer Electricals Limited, Janpath Tower, 3rd Floor, Ashok Nagar Unit li, Bhubaneswar- 751009, Odisha	0674-2531429
<b>Ranchi</b> : Ess Ess Agencies 3 West End Park, Kaju Bagan, Near Dav Junior School, Hehal Ratu Road Ranchi - 834005, Jharkhad	9771411293
<b>Patna</b> : 3rd Floor, Shri Sadan, House No. 9, Opp. Ruban Hospital, Near Patliputra Golamber, Patliputa Colony, Patna 800013, Bihar	8407074981
<b>West Region</b>	
<b>Mumbai</b> : Crompton Greaves Consumer Electricals Ltd. Business Square, A-Wing, 302, 3rd floor, Chakala, Opp Apple Heritage, Andher-Kurla Road, Andheri East, Mumbai- 400093	(022)61132700 / 9007059508
<b>Ahmedabad</b> : Crompton Greaves Consumer Electricals Ltd. 4th Floor , 405 Gala Argos, BH Gujarat College , Ahmedabad 380007. Gujarat	9909909332
<b>Pune</b> : Crompton Greaves Consumer Electricals Ltd. Durwankur Apartment. Wrangler. Paranjape Road, Behind Vaishali Hotel, FC Road, Pune-411004. Maharashtra	9167540712
<b>Indore</b> : Crompton Greaves Consumer Electricals LTD. 409, 4th Floor, Satguru Parinay, Infront of C21 Mall A . B. Road , Indore 452010 M.P.	9713244447
<b>Nagpur</b> : Crompton Greaves Consumer Electricals Ltd. 2nd Floor, Manik Bhawan, Plot No.7&8,Tatya Tope Nagar, West High Court Road, Nagpur-440015. Maharashtra	7389604075
<b>Raipur</b> : Crompton Greaves Consumer Electricals LTD, A-311, Crystal Arcade, Lodhi Para Square, Shankar Nagar, Raipur - 492007.	7222933334
<b>North Region</b>	
<b>Delhi, Ghaziabad &amp; Haryana</b> : 9-10 Bahadur Shah Zafar Marg, 3rd Floor Express Building , Near ITO Crossing. New Delhi-11002	011-23460700
<b>Jaipur</b> : Centre Point, 3rd Floor, Bhragu Nagar, Above Indusland Bank, DCM, Ajmer Road, Jaipur- 302006	0141-4712700
<b>Jalandhar</b> : Bxii-407, 2nd Floor, Near B.S.F Chowk, Ladowali Road, Jalandhar - 144001	0181-5044240
<b>Lucknow</b> : Cyber Height, 2nd Floor, Office Space No.210, Vibhuti Khand, Gomti Nagar, Lucknow - 226010	0522-4001511
<b>South Region</b>	
<b>Chennai</b> : Crompton House No.3, Dr. MGR Salai, Kodambakkam High Road, RBox No. 3316, Nungambakkam, Chennai - 600 034	044 - 40989533, 40989553, 4098514
<b>Coimbatore</b> : SF219, Annamalai Industrial Park, Kalapatti, Coimbatore - 641 048	7094473102, 7094473103
<b>Madurai</b> : 2/3, Mangakayarsi Womens College Road, Parvai, Madurai - 625 402 (Satellite Off)	0452 – 2667771, 2667772, 9047072952
<b>Bangalore</b> : J.P. Square, 3rd Floor, No.17, 3rd Cross, 5th Main, Chamrajpet, Bengaluru - 560 018	080 - 41391908, 41391914, 41391912
<b>Hyderabad</b> : No. 101 & 102,Babukhan Millennium Centre, Somajiguda, Hyderabad - 500 082	040 - 40709975, 40709999
<b>Cochin</b> : Cochin Branch, Door No. 3/5788, Zera Tower, Cheranallore, Cochin - 682034	0484 - 2433860/ 2433861

# Crompton

Dealer Stamp

**Crompton Greaves Consumer Electricals Limited**

Equinox Business Park, 1st Floor, Tower 3, LBS Marg,  
Kurla (W), Mumbai 400070. T: +91 22 6167 8499  
W: [www.crompton.co.in](http://www.crompton.co.in)